
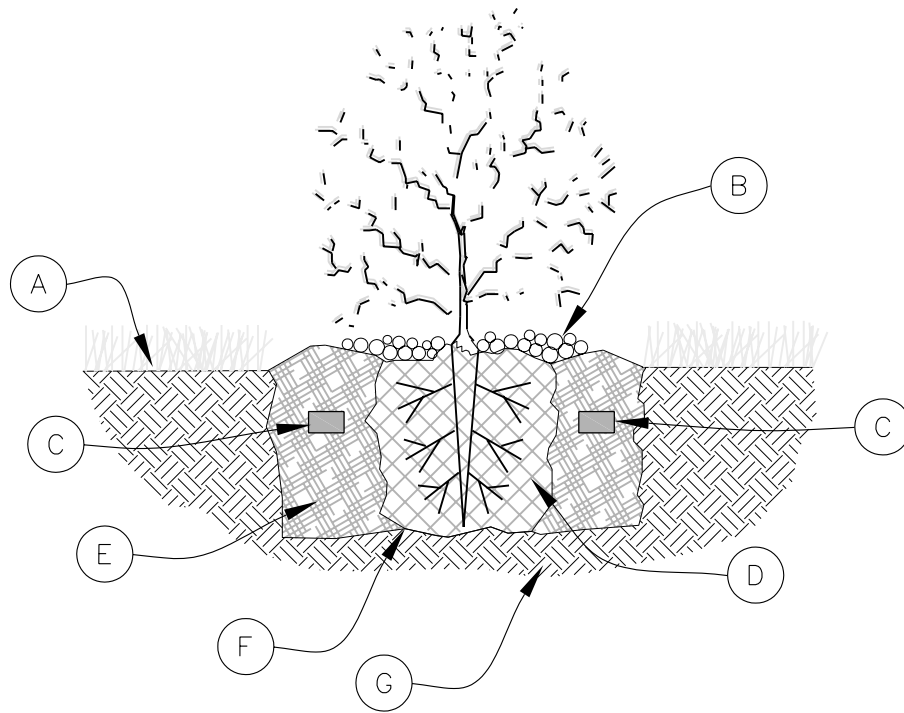


# ***LANDSCAPING STANDARD DETAILS***

**INDEX:**


*SHRUB PLANTING DETAIL.....LD-01*  
*TREE PLANTING DETAIL.....LD-02*  
*EVERGREEN PLANTING DETAIL.....LD-03*  
*LAWN SODDING/CONCRETE EDGE DETAIL.....LD-04*


1	APPROVED		PENDING		<p><b><u>LANDSCAPING DETAILS STANDARDS</u></b></p>	<h2 style="margin: 0;">LD-00</h2>
NO.	AUTHORIZED BY	REVISIONS	DATE	<p><b>DRAPER CITY</b></p>		



**NOTES**

- A. FINISH GRADE/TOP OF MULCH
- B. 2" MINIMUM SHREDDED BARK MULCH
- C. FERTILIZER TABLETS
- D. ROOT BALL
- E. SEE SPECIFICATIONS FOR PROPER SOIL MIXTURE
- F. PLANT HOLE SHALL BE TWICE AS WIDE AS ROOT BALL
- G. NATIVE SOIL

	APPROVED		PENDING	 <b>DRAPER CITY</b>	<p align="center"><b>SHRUB PLANTING DETAIL</b></p>	<p align="center"><b>LD-01</b></p>
NO.	AUTHORIZED BY	REVISIONS	DATE			

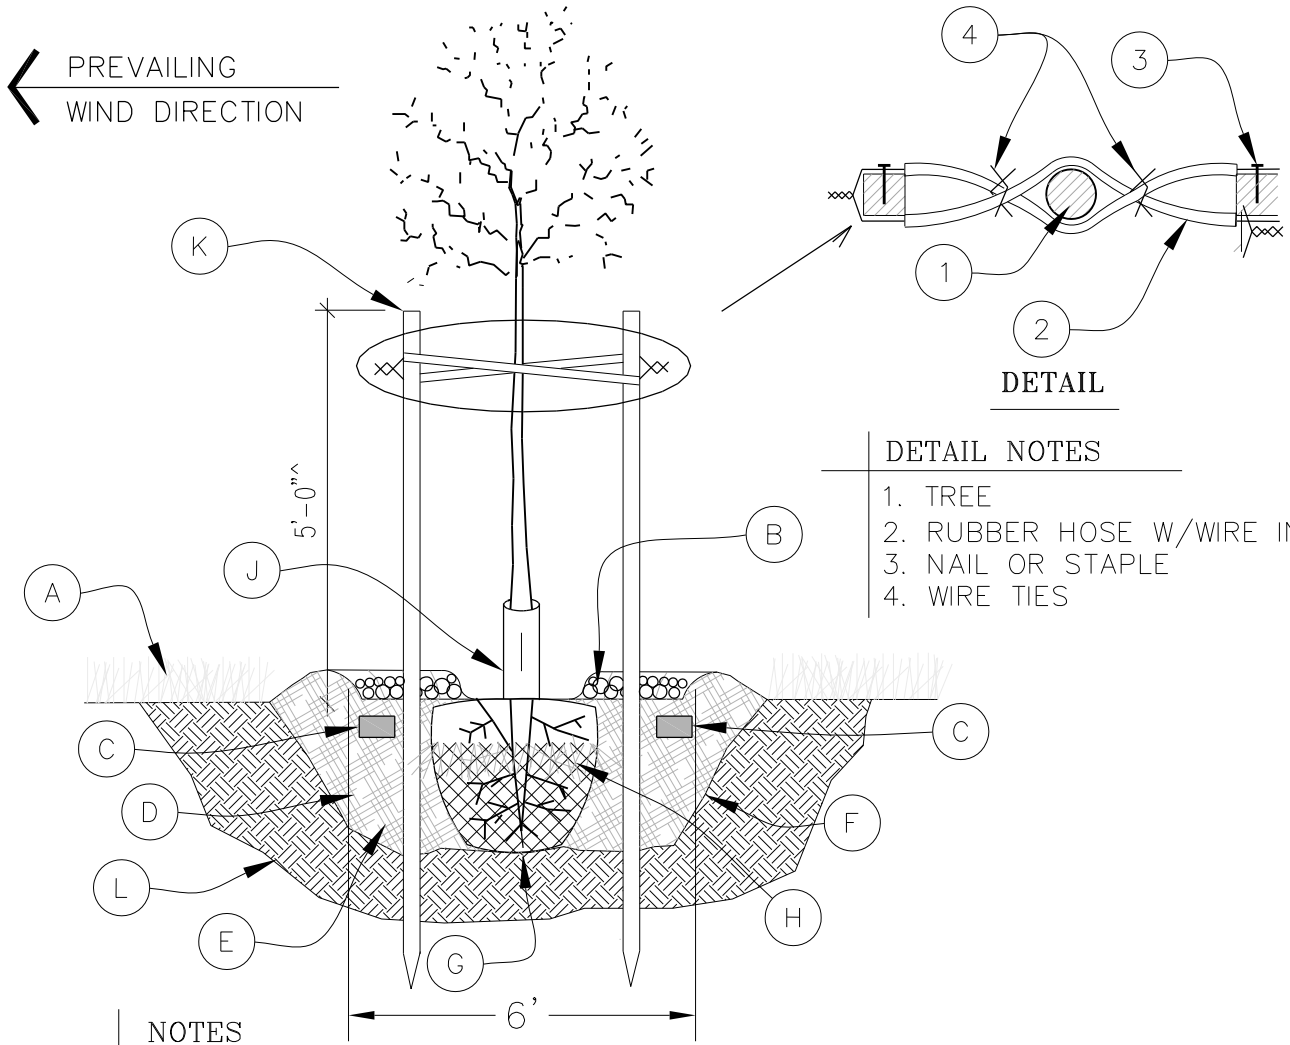


**DETAIL NOTES**

1. TREE
2. RUBBER HOSE W/WIRE INSIDE
3. NAIL OR STAPLE
4. WIRE TIES

**NOTES**

- A. FINISH GRADE/TOP OF MULCH
- B. 6' DIA. 2" DEEP MINIMUM SHREDDED BARK MULCH
- C. FERTILIZER TABLETS
- D. SEE SPECIFICATIONS FOR PROPER SOIL MIXTURE
- E. PLANT PIT SHALL BE TWICE AS WIDE AS ROOT BALL
- F. ROUGHEN SIDES AND BOTTOM OF PLANT PIT
- G. PLACE ROOT BALL ON NATIVE SOIL
- H. CUT & REMOVE BURLAP, TWINE & WIRE FROM TOP 2/3 OF BALL PRIOR TO BACKFILLING
- J. SET ROOT CROWN 1" ABOVE GRADE
- K. (2) 2" LODGE POLE PINE STAKES OR (2) 2" X 2" X 8' FIR STAKES. DRIVE STAKES INTO GROUND PRIOR TO BACK FILLING
- L. NATIVE SOIL

1	APPROVED		PENDING		<p><b>TREE PLANTING DETAIL</b></p>	<p><b>LD-02</b></p>
NO.	AUTHORIZED BY	REVISIONS	DATE	<p><b>DRAPER CITY</b></p>		

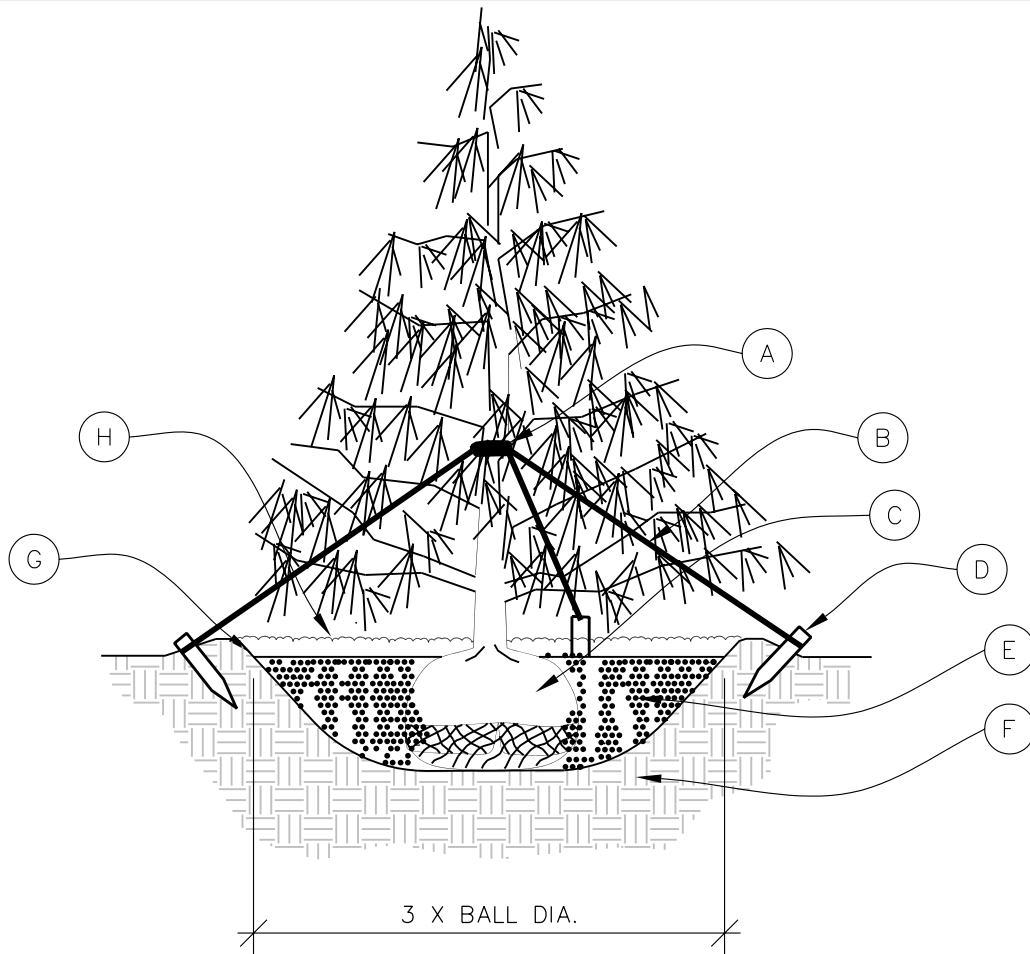


**NOTES**

1. PLANT SO THAT TOP OF ROOT BALL IS EVEN WITH THE FINISHED GRADE. FLAG GUYING WIRES WITH SURVEYOR TAPE

**PART LIST**


- A. RUBBER HOSE 1" DIA.
- B. 2 STRAND TWISTED 12 GAUGE GALVANIZED GUYING WIRES
- C. REMOVE BURLAP FROM TOP 2/3 OF ROOT BALL
- D. 2"X4"X24" TREATED STAKES (3 REQ'D) WITH TOP OF STAKE 6" ABOVE GROUND
- E. BACKFILL MIX (SAME AS DECIDUOUS TREE PLANTING) WATER & TAMP TO REMOVE AIR POCKETS
- F. EXISTING SOIL
- G. FORM SAUCER TO RETAIN WATER
- H. 2" MIN. DEEP SHREDDED BARK MULCH—EXTEND TO DRIP LINE OF TREE

1	APPROVED		PENDING		<p><b>EVERGREEN PLANTING DETAIL</b></p>	<p><b>LD-03</b></p>
NO.	AUTHORIZED BY	REVISIONS	DATE			

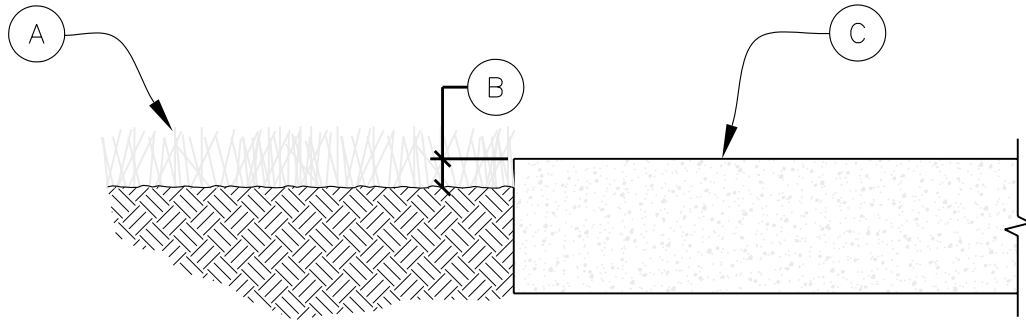

NOTES

- A. FINISH GRADE/TOP OF MULCH
- B. FINISHED GRADE PRIOR TO INSTALLATION OF SOD SHALL BE 2" BELOW TOP OF CONCRETE
- C. CONCRETE CURB, SIDEWALK OR MOW STRIP

1	APPROVED		PENDING	 <b>DRAPER CITY</b>	<u>LAWN SODDING</u> <u>CONC. EDGE</u> <u>DETAIL</u>	<b>LD-04</b>
NO.	AUTHORIZED BY	REVISIONS	DATE			